

wheel jet 2 / 5 e **new**

thermostatic valve for protection against overheating

triplex plunger high pressure pump
cast brass pump head

water inlet
with stainless steel mesh filter

solid rubber wheels
massive, all-terrain and extra large


start/stop-automatic
device switches in stand-by after approx. 25 sec. when the gun is not triggered and starts again when the gun is triggered (only wheel jet 5)

electric engine
low noise level, 2,800 rpm and air cooling

easily access for maintenance:
oil filler neck, oil level gauge, manometer



machine positions:
upright for transport and storage, horizontal for operation

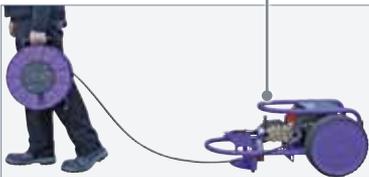

heavy duty
designed for 24 h operation

option: use of hot water operation with the falch H99 heating module (g312) for special applications

hose reel inclusive, simply to remove



pressure regulation
with stepless regulation valve

tubular frame
extremely solid, powder-coated, Ø 35 mm

pad buffer
for safe positioning


falch order system:
on the rear side accessory holder for guns, nozzles and extension lances



practical cable holder
for 5.0 m electric cable, 230 V / 400 V connection-plug, 50 Hz, 16 A



transport: simple loading in estate car possible



wheel jet 2 / 5 e



accessories

standard accessories

wheel jet 2 e



20 m high pressure hose on hose reel

wheel jet 5 e



20 m high pressure hose on hose reel

optional accessories



z081 rotor nozzle



z015 extension lance



z009 quick coupling set 3/4"



sand blasting



s108 pipe cleaning hose, drainstop 2

applications



technical data

	wheel jet 2 e	wheel jet 5 e
	30 - 100 bar	30 - 200 bar
	5 - 10 l/min	5 - 13 l/min
	2,0 kW / 1,8 kW, 2800 rpm, air	6,0 kW / 5,0 kW, 2800 rpm, air
	230 V/50 Hz/16 A, 5,0 m	400 V/50 Hz/16 A, 5,0 m
	1,8 kW, 2800 rpm, 2,0 - 8,0 bar, 60° C	5,0 kW, 2800 rpm, 2,0 - 8,0 bar, 60° C
	045 USgal/min	040 USgal/min
	-	■
	24 h	24 h
	24 months	24 months
	45 kg	55 kg
	1000 x 570 x 430 mm	1000 x 570 x 430 mm
	LpA = 74 dB LwA + 1,5 dB = 90 dB	LpA = 75 dB LwA + 1,5 dB = 91 dB
	g349	g334



falch gmbh
siemensstrasse 1 - 7
89188 merklingen (germany)

+49 (0)7337/81-0
+49 (0)7337/81-181

info@falch.com
www.falch.com